



06059 Glacier




National Parks Collection

Product Specifications

Color Number	06051-06059
Dimension	7.17" Width x 48.82" Length
Construction	Stone Polymer Composite
Locking System	UNILIN Uniclic
Thickness	6.5mm (5mm SPC + 1.5mm PAD)
Wear Layer	12mil (0.3mm)
Underlayment type	IXPE
Surface	BP Surface
Edge Profile	Painted Bevel
Installation	Floating
Installation Grade	Install on All Levels
Warranty	25 Year Residential / 5 Year Light Commercial
Area per Carton	24.29 SF
Area per Pallet	1,214.5 SF
PC per Carton	10 Planks
Acoustic Rating	STC 74 / IIC 73

Technical Test Data

Dimensional Stability	ASTM F2199-09	Pass: ≤ 0.01 in. per Linear Foot
Resistance to Chemicals	ASTM F925-1	Rating 0: No Change
Formaldehyde Emissions	ASTM D5116-10	No Formaldehyde
Slip Resistance	DIN51130	R10
Abrasion	ASTM D4060	0.002% Mass Loss
Curling	ISO 23999 / EN434	0.03mm
Reaction to Fire	EN13501-1	Class BFL-S1
Static Load	ASTM F970	0.00mm
Antibacterial Activity	ASTM G21-15	Pass: No Growth Observed
Critical Radiant Flux	ASTM E648-17	Flux: ≥ 0.45 W/cm ²

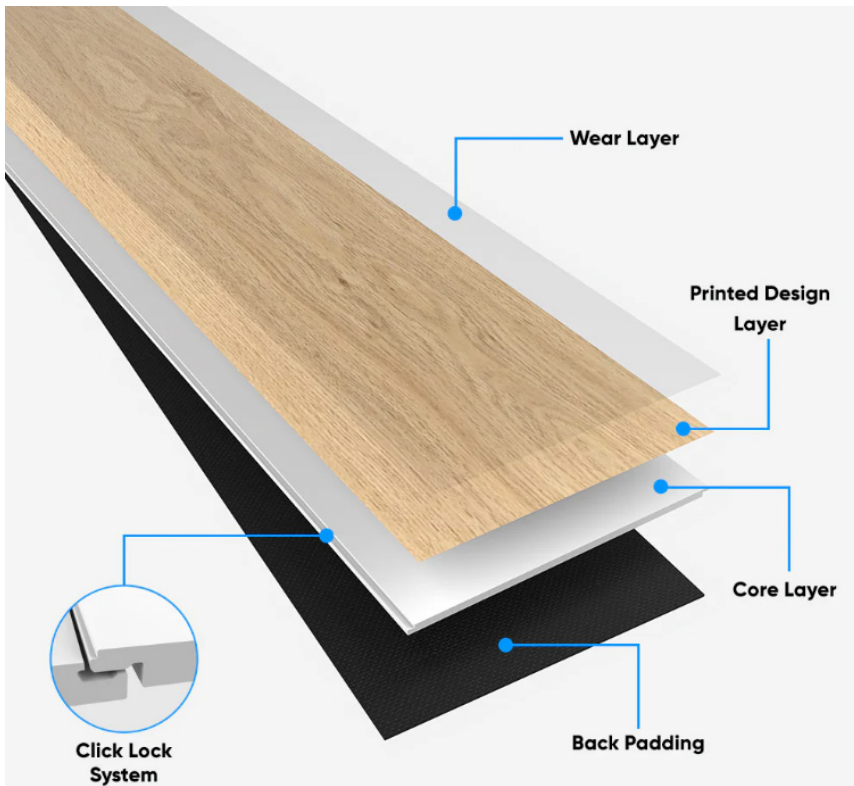

FloorScore Certified to meet (IAQ) standards, it qualifies for many green building schemes including LEED v4, WELL, BREEAM, CHPS, and Green Globes.

The product is made from 100% virgin materials, no recycled materials are used in manufacturing, which ensures product stability and durability.

ColorMatching moldings available for T-molding, Reducer, and Stair Nosing.

Featuring one of the most reliable locking system. The painted bevels add to a more realistic appearance.





06051 Jasper



06052 Gros Morne




06053 Banff



06054 Grasslands



06055 Yoho

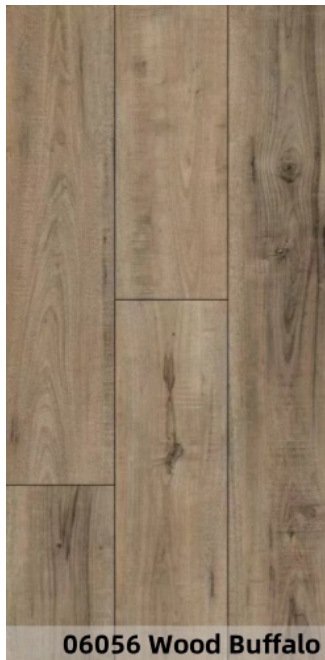

06056 Wood Buffalo



06057 Fundy



06058 Gulf Islands



06059 Glacier