


## Product Specifications

Total Thickness:	10mm ( 8mm + 2mm HD [3X] Waffle Pad)
Width:	8.98" (228.09mm)
Length:	60.63" (1540mm)
Finish:	UV Cured Urethane
Wear Layer:	0.5mm (20 mil)
Surface Texture:	EIR
Locking System:	Välinge 5G
Relative Humidity	35%-55%
Edges:	Painted Bevel Edges
Construction:	WPC (Wood Polymer Composite)
Installation Methods:	Floating (Please refer to Installation guide)
Warranty:	Lifetime Residential / 15-Year Light Commercial
Moldings:	Color Matching T-mold, Reducer, Stair Nosing

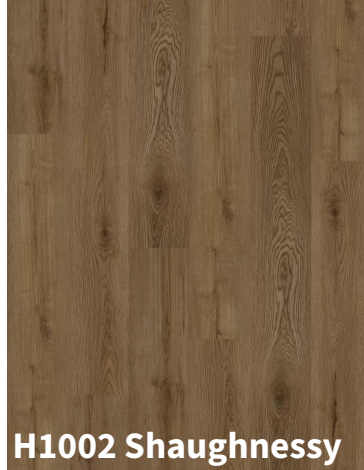

## **PACKAGING INFORMATION**

<b>Pcs Per Carton</b>	<b>8 Pcs / CTN</b>
<b>Cartons Per Pallet</b>	<b>55 CTN / Pallet</b>
<b>SQFT Per Carton</b>	<b>30.25 SQFT/ CTN</b>
<b>SQFT Per Pallet</b>	<b>1,663.75 SQFT / Pallet</b>