



**0365H Driftwood Herringbone**




**VERSAILLES  
HERRINGBONE**

## Product Specifications

<b>Color Number</b>	0180H & 0365H
<b>Dimension</b>	5.04" Width x 24.21" Length
<b>Construction</b>	Stone Polymer Composite
<b>Locking System</b>	Unilic Angling Locking
<b>Thickness</b>	6.5mm (5mm SPC + 1.5mm PAD)
<b>Wear Layer</b>	20mil (0.5mm)
<b>Underlayment type</b>	IXPE
<b>Surface</b>	Oak Emboss (Random EIR)
<b>Edge Profile</b>	Painted Bevel
<b>Installation</b>	Floating
<b>Installation Grade</b>	Install on All Levels
<b>Warranty</b>	25 Year Residential / 5 Year Light Commercial
<b>Area per Carton</b>	20.34 SF
<b>Area per Pallet</b>	1,098.36 SF
<b>Cartons per Skid</b>	54 Cartons
<b>Acoustic Rating</b>	STC 73 / IIC 72

# Technical Test Data

Dimensional Stability	ASTM F2199-09	Pass: $\leq 0.01$ in. per Linear Foot
Resistance to Chemicals	ASTM F925-1	Rating 0: No Change
Formaldehyde Emissions	ASTM D5116-10	No Formaldehyde
Slip Resistance	DIN51130	R10
Abrasion	ASTM D4060	0.002% Mass Loss
Curling	ISO 23999 / EN434	0.03mm
Reaction to Fire	EN13501-1	Class BFL-S1
Static Load	ASTM F970	0.00mm
Antibacterial Activity	ASTM G21-15	Pass: No Growth Observed
Critical Radiant Flux	ASTM E648-17	Flux: $\geq 0.45$ W/cm <sup>2</sup>

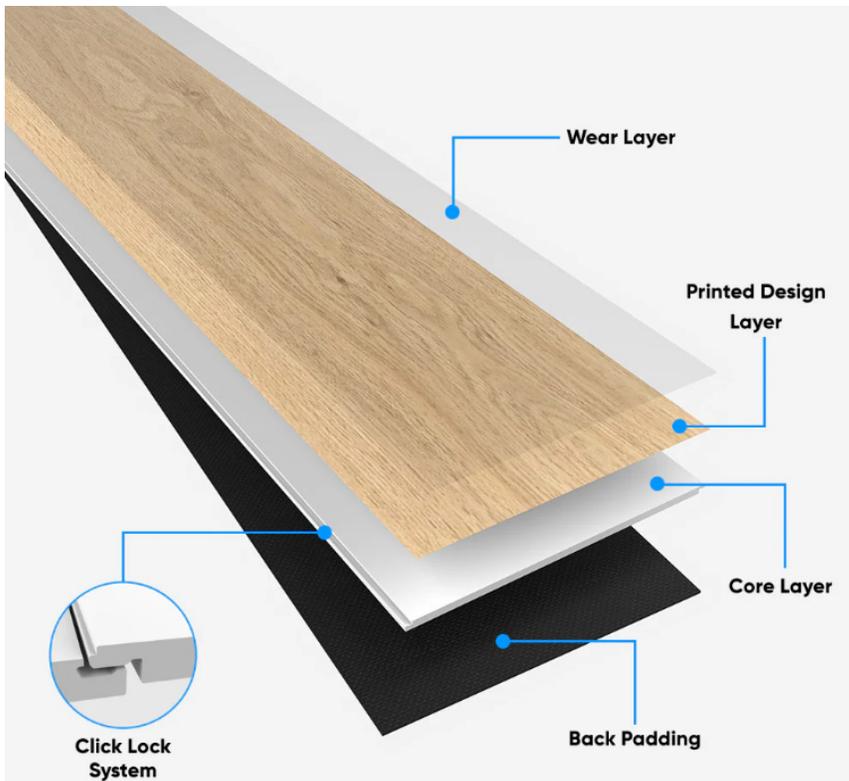

FloorScore Certified to meet (IAQ) standards, it qualifies for many green building schemes including LEED v4, WELL, BREEAM, CHPS, and Green Globes.

The product is made from 100% virgin materials, no recycled materials are used in manufacturing, which ensures product stability and durability.

ColorMatching moldings available for T-molding, Reducer, and Stair Nosing.

Featuring a commercial-grade 20mil wear layer, painted bevels add to a more realistic appearance.




# VERSAILLES HERRINGBONE

---



**0180H Golden Harvest Herringbone**

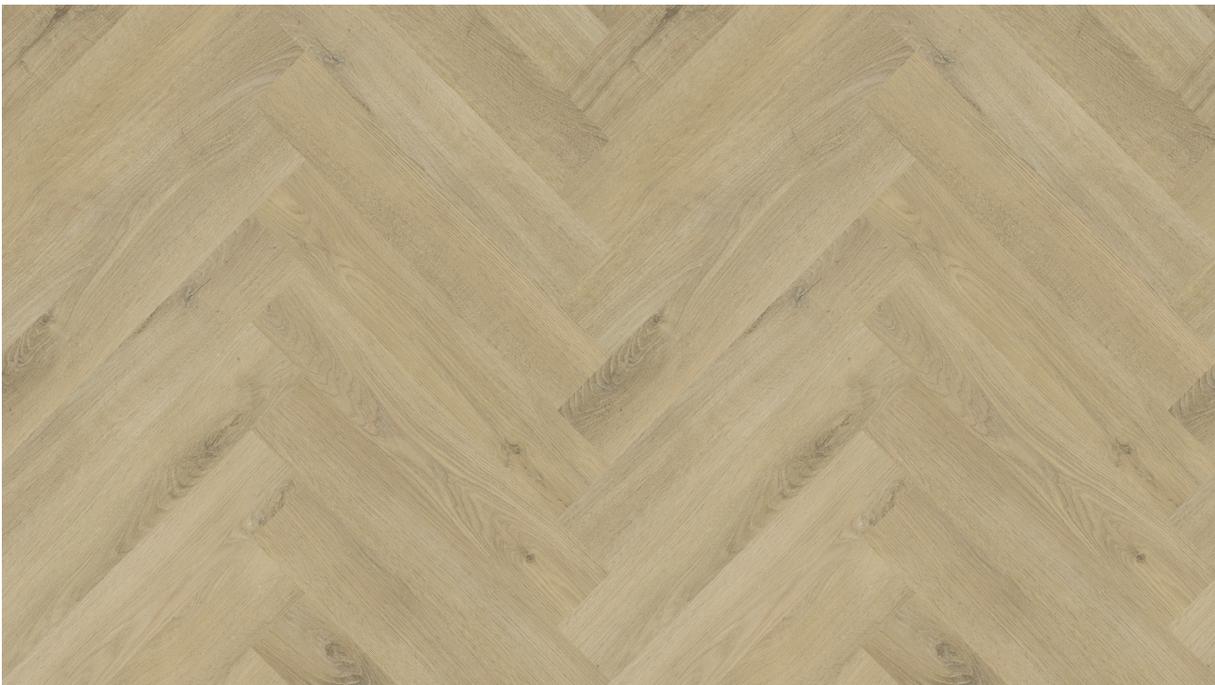

**0365H Driftwood Herringbone**