


## PRODUCT SPECIFICATIONS

<b>Construction</b>	Loose lay Luxury Vinyl Plank
<b>Total Thickness</b>	0.197" (5mm)
<b>Wear Layer</b>	0.55mm / 22mil
<b>Length</b>	48.39" (1229mm)
<b>Width</b>	7.44" (189mm)
<b>Edge Detail</b>	4-sided Microbevel
<b>Finish</b>	Embossed Surface
<b>Top Surface</b>	UV Cured & Ceramic Bead Protection
<b>Fiberglass Layer</b>	Yes
<b>Installation</b>	Loose lay & Glued down(recommended)
<b>Suitable Location</b>	On, Above or Below Grade
<b>Radiant Heat</b>	Hydronic Heated Floor, Max. Temp 25°C
<b>Application</b>	Residential & Light - Medium Commercial Use
<b>Certification</b>	FloorScore, ASTM, CE, Phthalates Free
<b>Warranty</b>	Limited Lifetime Residential, 15-Year Commercial

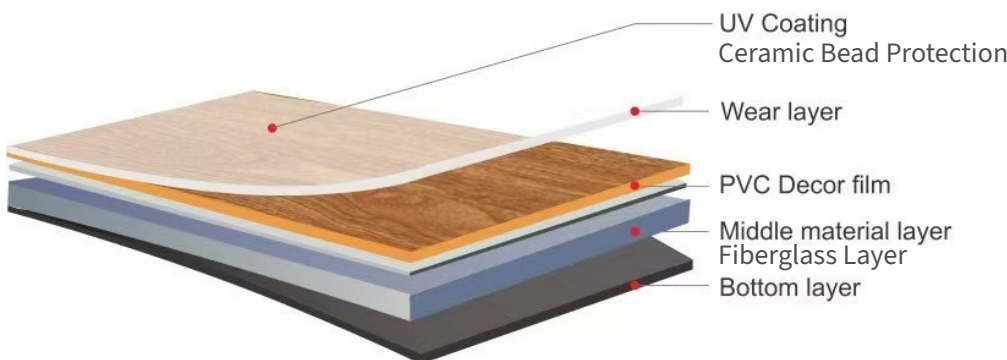

## TECHNICAL DATA SHEET

<b>Fire Rating</b>	EN 13501-1 Bf1-S1 Mekel Burner Test Pass	ASTM E 648-06	Pass / Class 1
<b>Heat Stability</b>	KSM 3802 0.3mm / 0.01 (80C, 6 hr)	ASTM F1514	Pass
<b>Slip Resistance</b>	BS 7976-2 Pendulum Test: Low Rz Surface Roughness: Moderate	ASTM D 2047-93	Pass
<b>Residual Indentation</b>	EN 433 ≤ 0.1mm	ASTM F 1914/F 970	Pass
<b>Color Fastness</b>	EN 20105: B02 Method A ≥ 6	ASTM F 1515	Pass
<b>Dimensional Stability</b>	EN 434 ≤ 0.25%	ASTM F 2199	Pass
<b>Flexibility</b>	EN 435 No Crack was Found	ASTM F 137	Pass
<b>Electrial Behavior</b>	EN 1081 Pass	ASTM F 150-06	Pass
<b>Chemical Resistance</b>	EN 423 Pass	ASTM F 925 ASTM F 1344	Pass
<b>Toxic Element Test</b>	EN 71-3 Pass. Does not contain heavy metal and formaldehyde		
<b>Smoke Density</b>		ASTM E 662	Pass

## PACKAGING INFORMATION

<b>Pcs Per Carton</b>	12 Pcs / CTN
<b>Cartons Per Pallet</b>	45 CTN / Pallet
<b>SQFT Per Carton</b>	30 SQFT/ CTN
<b>SQFT Per Pallet</b>	1,350 SQFT / Pallet

